



FLiP *PHONE ACT*
user guide

Version 1.1

FLIP KIT



FLIP Phone Terminal



AC/DC Power Supply





LAN Cable



User Guide

SPECIFICATION

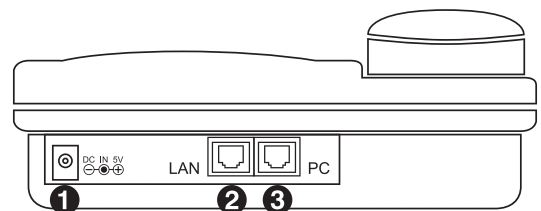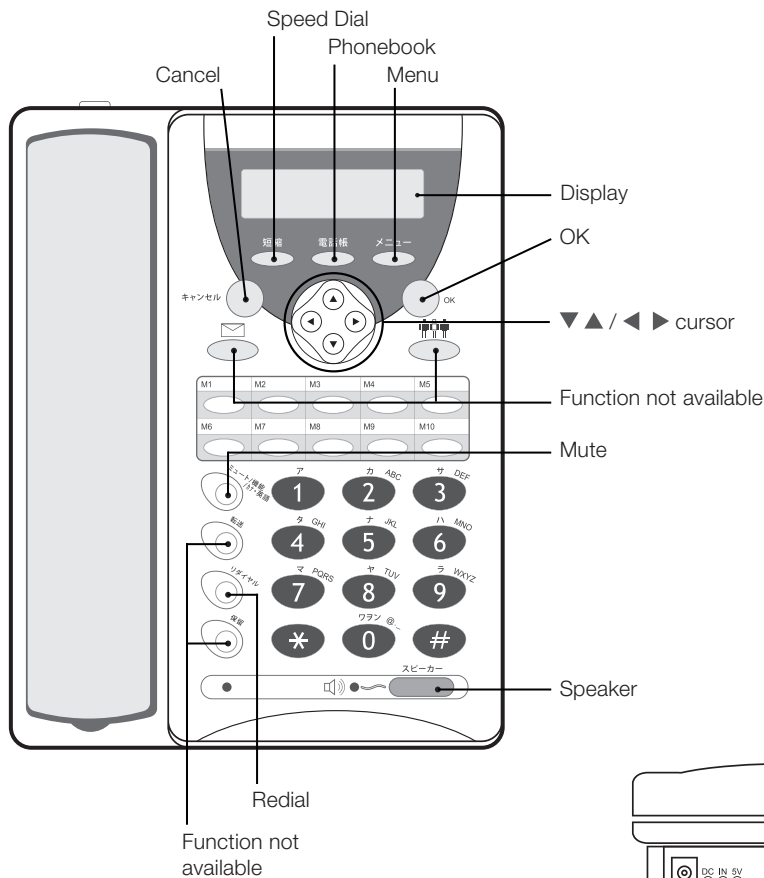

- ① 5V DC: Connect to the AC/DC power supply
- ② LAN: Connect to the modem or router
- ③ PC: Connect to the PC

TERMINAL FUNCTIONS

FUNCTIONS	PROCEDURE
Changing the display language	<ol style="list-style-type: none"> 1. Press the ミュート/機能/カナ・英数 (mute) button. 2. Press 1. 3. In the display it will show Language/ゲンゴ. 4. With ◀ ▶ select ニホンゴ (Japanese) or English. 5. Press OK.
Placing a call	<ol style="list-style-type: none"> 1. Dial the desired number. 2. Pick up the receiver, or 3. Press the スピーカー (speaker) button.
	<p>To redial the last number called:</p> <ol style="list-style-type: none"> 1. Press the リダイヤル (redial) button. 2. When the number appears in the display 3. Press the OK button and pick up the receiver, or 4. Press the スピーカー (speaker) button.
Phonebook functions (電話帳)	<p>To save a phone number:</p> <ol style="list-style-type: none"> 1. Press the 電話帳 (phonebook) button until Name shows in the display. 2. Using the phone's key pad enter the person's name and press OK. 3. Enter the phone number and press OK. 4. To confirm registration, press OK once more. <p>To cancel the procedure, press the キャンセル (cancel) button.</p>
	<p>To search for a phone number:</p> <ol style="list-style-type: none"> 1. Press the 電話帳 (phonebook) button. 2. With ▼ ▲ select the desired phone number. <p>To call the selected number, press the OK button and pick-up the receiver or, press the スピーカー (speaker) button.</p>
	<p>To edit a phone number:</p> <ol style="list-style-type: none"> 1. Press the 電話帳 (phonebook) button. 2. With ▼ ▲ select the desired phone number. 3. Press the 電話帳 (phonebook) button. 4. With ◀ ▶ select Edit. 5. Press the OK button. 6. Edit the name and/or phone number. 7. Press the OK button. 8. To confirm registration, press OK once more. <p>To cancel the procedure, press the キャンセル (cancel) button.</p>

TERMINAL FUNCTIONS

FUNCTIONS	PROCEDURE
<p>Phonebook functions (電話帳)</p>	<p>To delete a phone number:</p> <ol style="list-style-type: none"> 1. Press the 電話帳 (phonebook) button. 2. With ▼ ▲ select the desired phone number. 3. Press the 電話帳 (phonebook) button. 4. With ◀ ▶ select Delete. 5. Press the OK button. 6. To confirm deletion, press OK once more. <p>To cancel the procedure, press the キャンセル (cancel) button.</p>
<p>Speed Dial (短縮)</p>	<p>To save a phone number:</p> <ol style="list-style-type: none"> 1. Press the 短縮 (speed dial) button. 2. Enter the Speed Dial number that you wish to save the phone number to (between 00 to 09). 3. Press the OK button. 4. Enter the destination phone number. 5. Press the OK button. <hr/> <p>To place a call using Speed Dial:</p> <ol style="list-style-type: none"> 1. Press the * (asterisk) key and Speed Dial number. 2. Press the OK button. 3. Pick up the receiver or press the スピーカー (speaker) button. <hr/> <p>To edit a phone number:</p> <ol style="list-style-type: none"> 1. Press the 短縮 (speed dial) button. 2. Enter the Speed Dial number you wish to edit (i.e.: between 00 to 09). 3. Press the OK button. 4. Delete the phone number by pressing ◀. 5. Enter the new phone number. 6. Press the OK button.
<p>Calling History</p>	<p>To check outgoing calls:</p> <ol style="list-style-type: none"> 1. Press the リダイヤル (redial) button. 2. With ▼ ▲ check the outgoing calls. 3. With ◀ ▶ check call dates and time. <p>Note: press the OK button if you wish to redial the number.</p> <hr/> <p>To check incoming calls:</p> <ol style="list-style-type: none"> 1. Press the リダイヤル (redial) button twice. 2. With ▼ ▲ check the incoming calls. 3. With ◀ ▶ check call dates and time. <p>Note: press the OK button if you wish to redial the number.</p>

TERMINAL FUNCTIONS

FUNCTIONS	PROCEDURE
Volume Adjustment	Handset volume: Pick-up the receiver and press ▼ ▲ to adjust the volume.
	Speaker volume: 1. Press the スピーカー (speaker) button. 2. Press ▼ ▲ to adjust the volume.
	Ringer volume: With the receiver down, press ▼ ▲ to adjust the volume.
Mute (ミュート/機能/カナ・英数)	While in a call press the ミュート/機能/カナ・英数 (mute) button. Press again to unmute.

SETTING UP THE TERMINAL

Setup will depend on other devices already connected to your internet connection.


Check which illustration shows your setup and follow the instructions.

After setting up the FLIP Phone terminal, wait a few minutes for the system to stabilize.

IMPORTANT: To use the service with the FLIP Phone ACT terminal is necessary to have a router or a modem with built-in router with the service provider information (PPPoE) already registered.


Case A: ADSL modem with built-in router

BEFORE

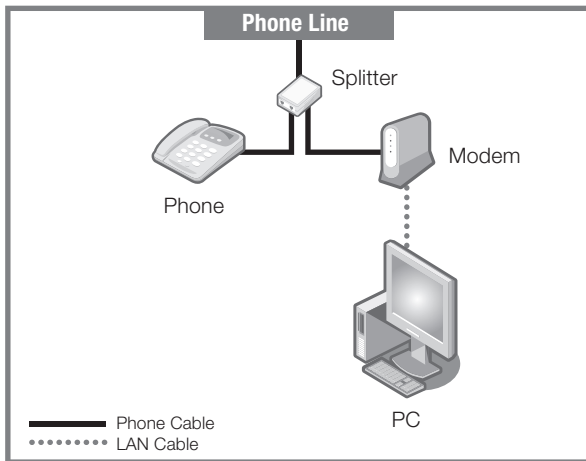


Before and after setting up the FLIP Phone ACT.

AFTER

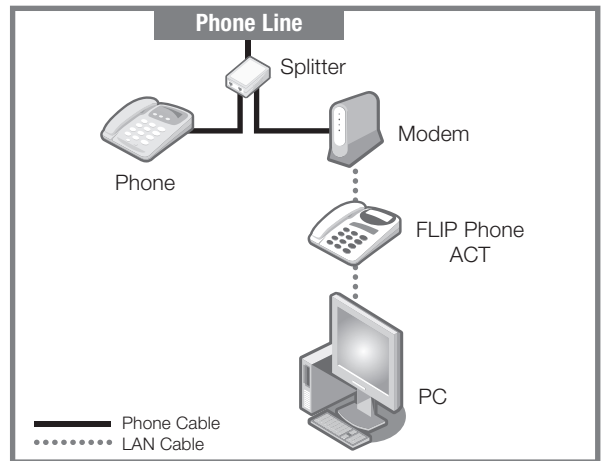


Case B: ADSL modem and router separately

BEFORE

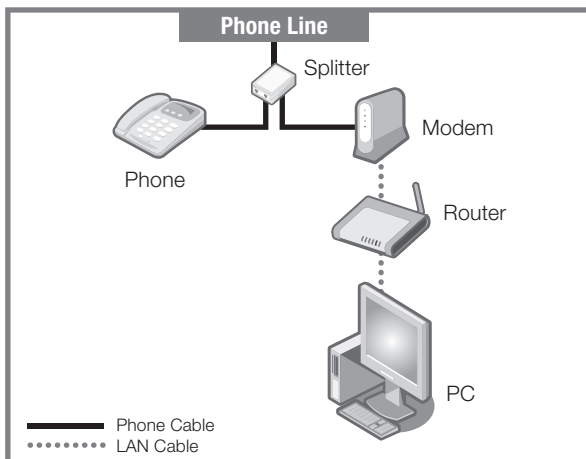


Before and after setting up the FLIP Phone ACT.

AFTER

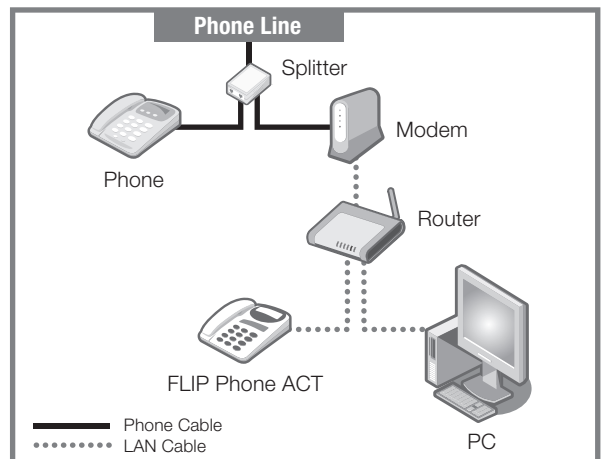


Case C: Optical fiber/hikari connection and modem (with built-in router)

BEFORE

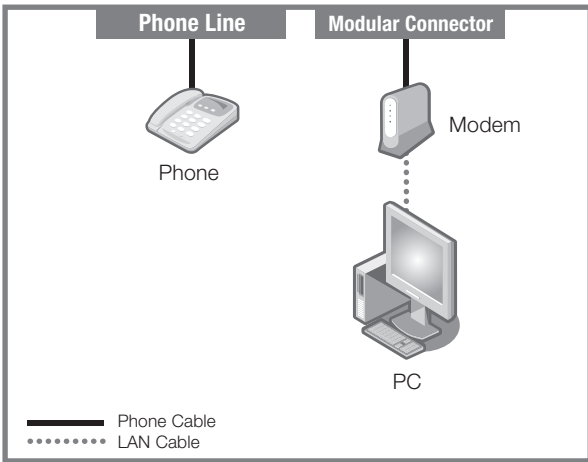


AFTER

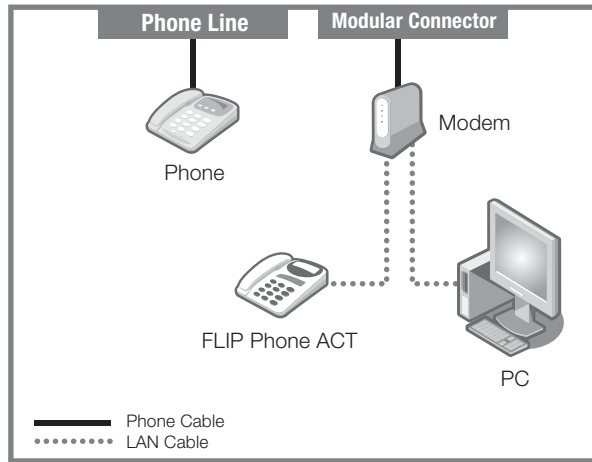


Before and after setting up the FLIP Phone ACT.

Case D: Optical fiber/hikari connection with modem and router separate

BEFORE

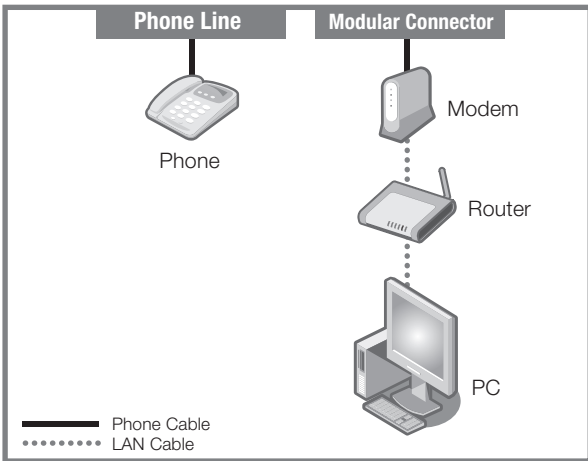


AFTER

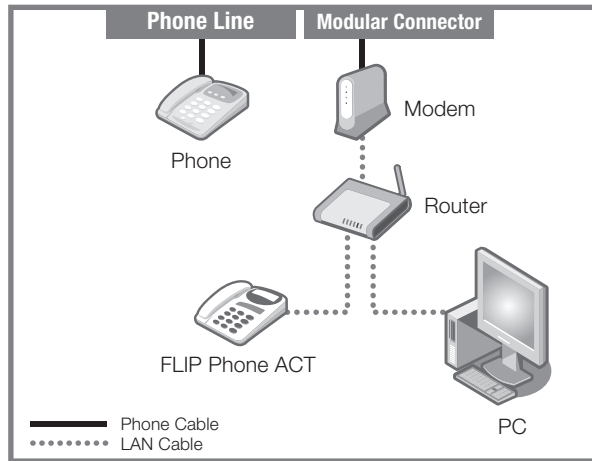


Before and after setting up the FLIP Phone ACT.

Case E: Optical fiber/hikari connection, IP phone with modem and router separate

BEFORE

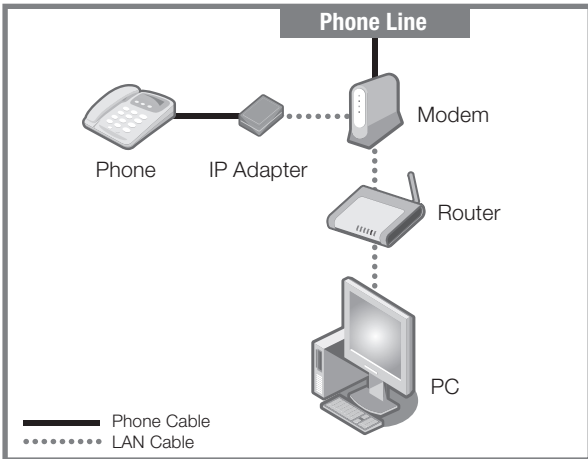

AFTER

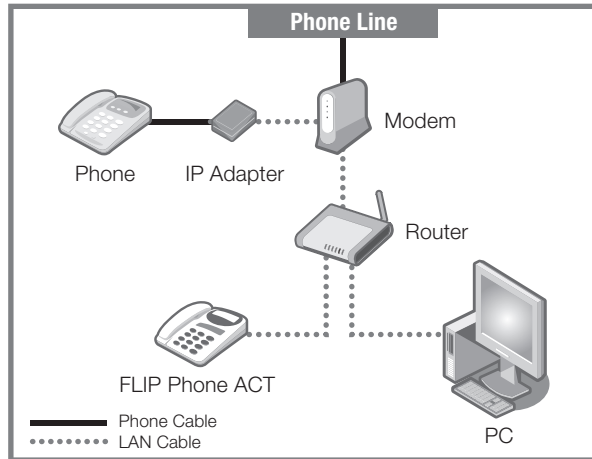

Before and after setting up the FLIP Phone ACT.